
Starla

Curved Stairs Model 260: Dimensions and Technical Information

Manual swivel, one-way automatic swivel and two-way automatic swivel seat

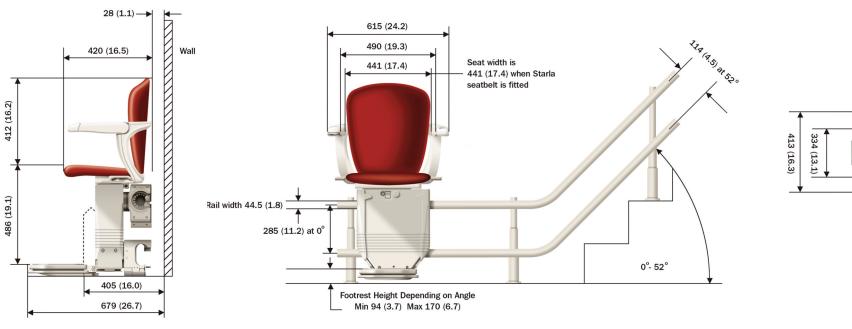

driven by footrest 679mm (26.7)
Arm dimension 661mm (26.0)

All product dimensions are accurate, however, you should add approximately 30mm on dimensions that require clearance for the user, such as the

minimum swivel width dimension.

Measurements are in millimetres. Measurements in brackets are inches. All dimensions measured from the wall are nominal. The addition of a wide stringer or similar obstruction may affect the dimensions taken from this point. The colour representation of the chair shown here is for illustrative purposes only. Weight limit note: Upto 135kg - approx 21 stone / 297 lbs. Powered hinge is limited to 120kg - approx 19 stone / 265 lbs.













Stannah Stairlifts, Watt Close, East Portway, Andover, Hampshire SP10 3SD Tel: +44 (0) 1264 364311 Fax: +44 (0) 1264 362276 Visit the website www.stannah.com

OUR COMPANY POLICY IS ONE OF CONTINUING PRODUCT IMPROVEMENT. WE THEREFORE RESERVE THE RIGHT TO ALTER THE SPECIFICATIONS AND TO CHANGE AND IMPROVE DESIGN AT ANY TIME. FULL OPERATING INSTRUCTIONS ARE SUPPLIED FOR ALL PRODUCTS.
STANNAH IS A REGISTERED TRADEMARK. THE CE MARK INDICATES THAT THIS PRODUCT COMPLES WITH THE APPLICABLE EUROPEAN DIRECTIVES WHICH RELATE TO HEALTH, SAFETY, ENVIRONMENT AND CONSUMER PROTECTION. DESIGN, MANUFACTURE AND
INSTALLATION: STANNAH STAIRLIFTS LITD HAS BEEN ACCREDITED TO ISO9001: 2008 SINCE 2009, THIS IS FOR DESIGN, DEVELOPMENT, PRODUCTION AND DISTRIBUTION OF STAIR LIFTS. ALTERATIONS IN MODELS, STANDARD AND OPTIONAL EQUIPMENT AS DESCRIBED
IN THE TEST AND ILLUSTRATIONS, MAY OCCUR. FOR PRECISE INFORMATION PLEASE CONTACT YOUR STANNAH DEALER. ISSUE 2: FEB 2012



107.5 (4.2) Rail to Wall

6

Minimum staircase width