



### Optionals :

→ NL Receiver



→ Stethoscope Headset



→ Headset for NL Receiver



### FEATURES:


- Stereo reception
- Optical input on the base\*
- Analogue stereo audio or microphone input on the base: jack 3.5mm\*\*
- Receiver compatible with headphone or neck loop with male jack 3.5mm
- Easy access to the settings from the receiver:
  - Volume control (up to 125dB spl)
  - Left/Right Balance Control
  - Tone Control
- Automatic stand-by mode (once the signal to the base has ceased)
- Integrated microphone to amplify the ambient sound
- Comfortable and lightweight

### TECHNICAL SPECIFICATIONS

- **2,4 GHz digital**
- Frequency response: 100 – 16 000Hz
- Operation Frequency: 2.404.5-2.479.5GHz
- Modulation Type: GFSK
- Number of Channel: 16
- Bandwidth: 5MHz
- Bit Rate of Transmitter: 1Mbps
- Antenna Type: Internal Antenna
- More than 11 hours of continuous in use time
- Fast recharging station
  - Full charging time: 4 hours
  - The receiver recharges itself automatically once placed on the base
- Reaches 100m outdoor and 25m indoor
- Weight of the receiver: 38g

### BASE BOX COMPONENTS

- 1 Charging cradle
- 1 Power adaptor (1)
- 1 Audio Stereo cable 2m with jack M-M 3.5mm (2)
- 1 Optical cable (Toslink) 1.8m (3)
- 1 20cm cord adapter RCA-to jack 3.5mm (4)
- 1 Mini optical jack (5)

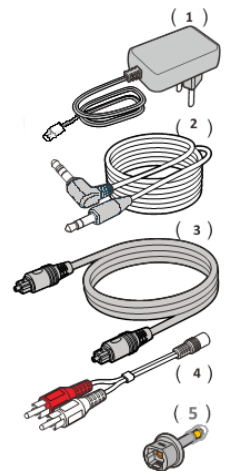

### NL RECEIVER BOX COMPONENTS

- 1 TV headset
- 1 Lanyard 75 cm (1)
- 1 Neck Loop (2)

